

Dual Battery Disconnect Switch

FR1050


Features & Benefits

- Ideal for dual battery applications where batteries can be operated independently or simultaneously
- Four distinct operating modes: Battery #1 ON only, Battery #2 ON only, All ON, and All OFF
- 300 Amp continuous current rating
- 1000 Amp surge rating for 5 second intervals
- Silver-plated contacts

Applications

- Single or dual battery disconnection
- Vehicle maintenance protection
- Helps prevent battery drain
- Fire safety device
- Theft deterrent

Dimensions

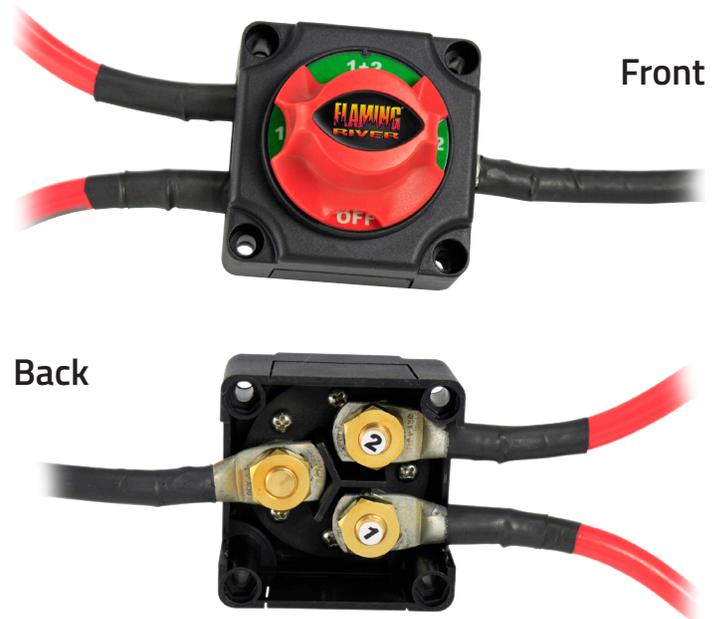

Specifications

Voltage	12V/24V
Max Continuous Current	250 Amps
Max Surge Current	2500 Amps
Environmental Protection	IP54
Operating Temperature	-40°F to +122°F (-40°C to +50°C)
Contact Terminals	Silver-Plated Copper
Contact Hardware	Brass
Terminal Diameter	M10
Terminal Length	0.50 in
Max Tightening Torque	11-13 ft-lbs
Warranty	1 Year

Kit Includes

- 1, Dual Battery Disconnect Switch
- 3 each, M10 Nuts, Lock, & Flat Washers

NOTE: Battery cables not included.